



2D REFERENCE SIZE(UNIT:mm)



- Housing Material: Brass pearled chrome
- Insulator Material: PPS
- Contact Material: Copper alloy
- Mating cycle: 5000 times(IEC 60512 test 9a)
- IP Rating: IP68。(IEC 60529)
- Humidity (max): <=95%[at 60℃]
- Temp (min/max): -55℃~+125℃(GB/T2423.3)
- Vibration: 10-2000Hz, 15g(IEC 60512-4 test 6d)
- Shock Resistance: 100g, 6ms(IEC 60512-4 test 6c)
- Salt Spray Corrosion: >96h(IEC 60512-6 test 11f)

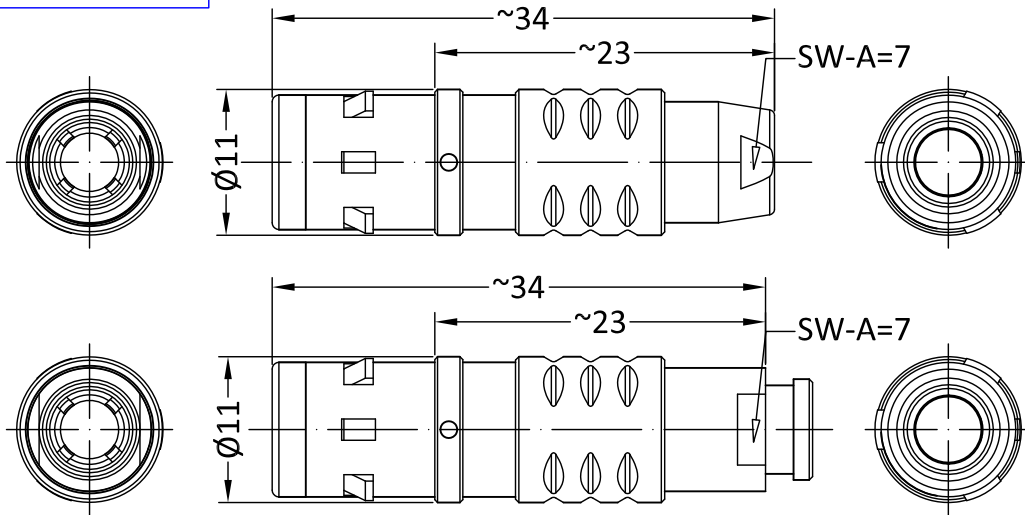

Images is for illustrative purpose only

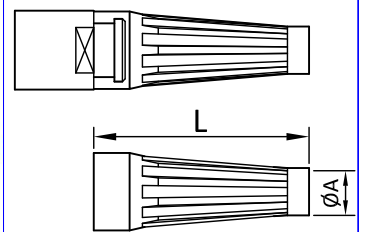

### PART NUMBERING SYSTEM:

#### STRAIGHT PLUG

#### MODEL

KEY:  
G=0°; A=30°;  
B=60°; C=90°; ...

#### SERIES

CONTACTS:3=MULTICORE;  
09=9PINS (2~9PINS OPTIONAL)

#### HOUSING:

C=BRASS PEARLED CHROME;  
K=BRASS PLATED BLACK CHROME;  
T=ALUMINIUM ALLOY PLATED NICKEL

INSULATOR:  
P=PPS;K=PEEK;

PGG.0K309.CPAC.\*\*\*

VARIABLE PARAMETER:  
M=OVERMOLDING;  
EMPTY=COLLET NUT  
WITHOUT BEND RELIEF

COLOR FOR BEND RELIEF:  
G=GREY;B=BLUE;W=WHITE;  
L=BLACK;R=RED;Y=YELLOW;  
M=BROWN;O=ORANGE;V=GREEN

#### CABLE:

32=(CABLEØ2.6mm-3.1mm);  
42=(CABLEØ3.2mm-4.1mm);  
52=(CABLEØ4.2mm-5.1mm);








C: CABLE COLLET

#### CONTACTS TYPE:

A=MALE SOLDER ;L:FEMALE SOLDER;  
D=PCB-MALE ;N=PCB-FEMALE;V=PCB- FEMALE ELBOW

SIZE(mm)			
BEND RELIEF	L	CABLEØ	
A		Max	Min
3.0	24	3.1	2.6
4.0	24	4.1	3.2
5.0	24	5.1	4.2

\*=Customers can choose the model according to their own needs

P/N	CORE	TYPE	PIN DIA (mm)	WORK VOLTAGE (KV rms)		RATED CURRENT (A)	CONTACT RESISTANCE (mΩ)	CABLE (AWG)	
				CONTACTS-CONTACTS	CONTACTS-SHELL			min.	max.
PGG.0K302.CPAC.***	2		0.9	1.05	1.35	10	6	32	20
PGG.0K303.CPAC.***	3		0.9	1.2	0.9	8	6	32	20
PGG.0K304.CPAC.***	4		0.7	0.85	0.7	7	7.5	32	22
PGG.0K305.CPAC.***	5		0.7	1.0	0.7	6.5	7.5	32	22
PGG.0K306.CPAC.***	6		0.5	0.85	0.65	2.5	10	32	28
PGG.0K307.CPAC.***	7		0.5	0.8	0.7	2.5	10	32	28
PGG.0K309.CPAC.***	9		0.5	0.6	0.5	2.0	10	32	28

\*=Customers can choose the model according to their own needs