




2D REFERENCE SIZE(UNIT:mm)

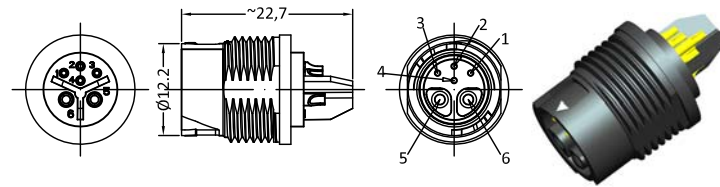

IMAGES FOR CONNECTOR ONLY

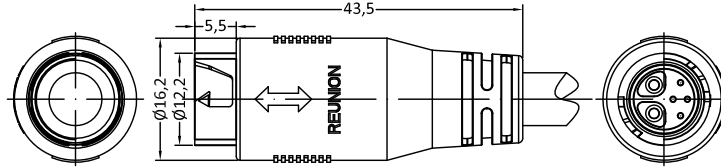

PART NUMBERING SYSTEM:

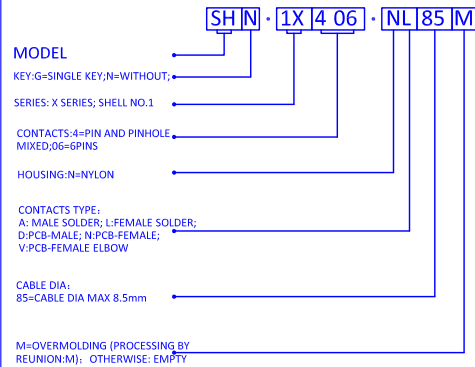

IMAGES FOR CONNECTOR P/VERMOLDING

*=CUSTOMERS CAN CHOOSE THE MODEL ACCORDING TO THEIR OWN NEEDS

P/N	CORE	TYPE	PIN DIA (mm)	WORK VOLTAGE (KV rms)	RATED CURRENT power/signal (A)	WORKING VOLTAGE power/signal(KV)
SHN.1X402.NL85M	2		2/1.3	1.5/0.6	12/6	0.5/0.2
SHN.1X403.NL85M	3		2/1.3 1/0.7	1.5/0.6	12/6	0.5/0.2
SHN.1X404.NL85M	4		2/1.3 2/0.7	1.5/0.6	12/6	0.5/0.2
SHN.1X405.NL85M	5		2/1.3 3/0.7	1.5/0.6	12/6	0.5/0.2
SHN.1X406.NL85M	6		2/1.3 4/0.7	1.5/0.6	12/6	0.5/0.2